



KR Audio Electronics Hi Vacuum Tube

KR 300Bxls

General Data



Filament specifications:	Voltage	5 V \pm 5 %
	Current	1.8 A
Amplification Factor		3.7


Maximum Ratings

DC Plate Voltage	600 V
DC Plate Current	160 mA
Plate Dissipation	70 W


Power Amplifier Class A1

DC Plate Voltage	450 V
DC Plate Current	100 mA
Grid Voltage	-94 V
Transconductance	5.7 mA/V
Plate Resistance	650 Ω

Dimensions

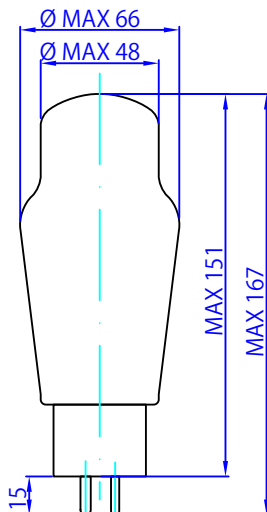

Connection of the Valve Base



View from below

F: Filament
A: Anode (Plate)
G: Grid

Plate characteristics KR 300BXLs

